


```
Baugruppen:
1.230.901 Schlauchfassung kpl. (1.234.649+390.040)

assemblies:
1.230.901 hose socket ass. (1.234.649+390.040)
```

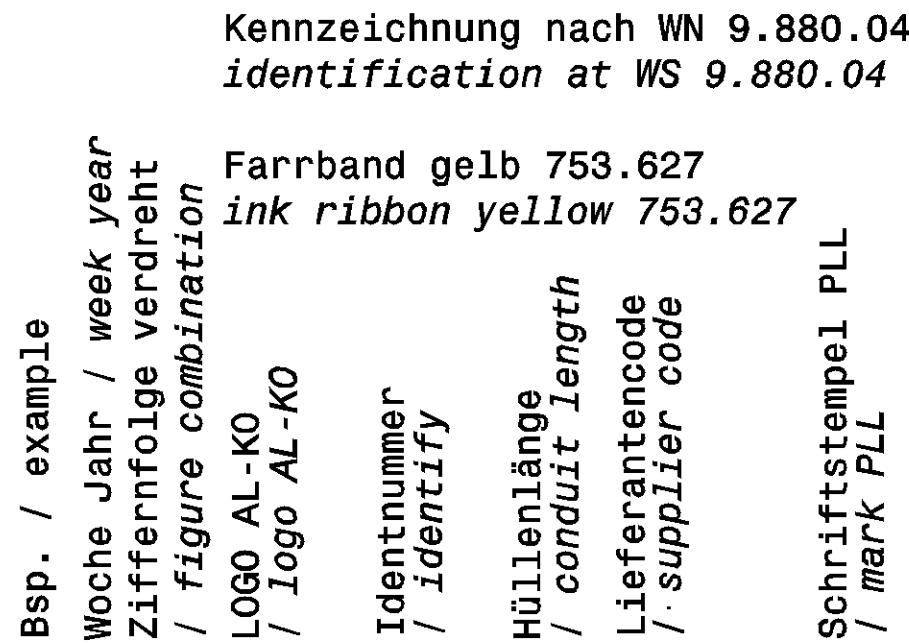

Arial 4,0 Datum, Werk
Arial 4,0 AL-KO (Stempel), Nummer, Hüllenlänge
Schriftstempel "Profi Long Life"

26																
25	1.292.500	i	2525	2300			1.230.957	1.234.839	1.234.854					Holl	\$.	
24	224.718	i	2085	1829			1.230.956	1.234.838	1.234.853					Holl	\$.	
23	350.496	q	800	529			1.230.955	1.234.837	1.234.852					Holl	\$.	
22	350.497	q	1700	1429			1.230.954	1.234.836	1.234.851					Holl	\$.	
21	1.212.588	e	1400	1150			1.230.953	1.234.835	1.234.850					Holl	\$.	
20	371.756	p	545	289			1.230.952	1.234.834	1.234.849					Holl	\$.	
19	224.602	q	2585	2329			1.230.951	1.234.833	1.234.848					Holl	\$.	
18	224.259	o	1330	1100			1.230.950	1.234.832	1.234.847					Holl	\$.	
17	224.254	o	2425	2169			1.230.949	1.234.831	1.234.846					Holl	\$.	
16	224.244	o	3005	2749			1.230.948	1.234.830	1.234.845					Holl	\$.	
15	224.243	o	1985	1729			1.230.730	1.234.093	1.234.094					Meyer	\$.	
14	208.880.04.05	n	605	349			1.230.947	1.234.829	1.234.844					Holl	\$.	
13	208.880.04.06	o	1265	1009			1.230.740	1.234.205	1.234.206					Meyer	\$.	
12	248.772.04.01	f	1400	1129			1.230.946	1.234.828	1.234.843					Holl	\$.	
11	248.772.04.02	f	1580	1309			1.230.945	1.234.827	1.234.842					Holl	\$.	
10	248.772.04.03	f	1040	769			1.230.944	1.234.826	1.234.841					Holl	\$.	
09	248.772.04	f	1160	889			1.230.943	1.234.825	1.234.840					Holl	\$.	
08	248.663.05	q	2045	1789			1.230.735	1.234.190	1.234.191					Meyer	\$.	
07	248.663.04	o	1865	1609			1.230.734	1.234.187	1.234.188					Meyer	\$.	
06	208.880.04.04	o	785	529			1.230.739	1.234.202	1.234.203					Meyer	\$.	
05	218.418.04	p	1685	1429			1.230.733	1.234.184	1.234.185					Meyer	\$.	
04	208.880.04.03	o	1025	769			1.230.738	1.234.199	1.234.200					Meyer	\$.	
03	208.880.04.02	o	1565	1309			1.230.737	1.234.196	1.234.197					Meyer	\$.	
02	208.880.04.01	o	1385	1129			1.230.736	1.234.193	1.234.194					Meyer	\$.	
01	208.880.04	p	1145	889			1.230.732	1.234.181	1.234.182				10.07.2009	Meyer	\$.	
Pos. no.	Material-Nr. <i>material-no.</i>	RevS	A	B	C	Huelle kpl. <i>conduit ass.</i>	Seil kpl. <i>wire ass.</i>	Huelle abgel. <i>conduit cut</i>	Innenrohr abgel. <i>inner tube cut</i>		Gewicht <i>weight</i>	Bemerkungen <i>remark</i>	Datum <i>date</i>	Name <i>name</i>	TAB	

Prüflast der Endstücke $\geq 6500\text{N}$ / 100%-Prüfung

Jedes Bremsseil ist mit 6500N so zu belasten, daß die Hülle gestaucht und die Litze gestreckt wird.

Bruchlast für aufgepreßte Litzenendstücke $\geq 7500\text{N}$
 Abzugskraft der Schlauchfassung: $\geq 300\text{N}$

Of1. Vorschriften gelten nicht für Preßstellen.

Litze mit dünnem Fettfilm versehen.
Molykote 33 light Al-K0 Nr. 800058

100% test force for cable end pieces $\geq 6500\text{N}$

Every rope has to be loaded with 6500N in a way that the conduit is compressed and the rope is stretched.

```

brakeforce for crimped rope end pieces ≥7500N
pull off force for the hose sockets ≥300N
crimped areas are excluded from the corrosion test

```

rope greased with a thin film of
Molykote 33 light Al-KO Nr. 800058

[illegible]