


FINITURE SUPERFICIALI - OBERFLAECHEBEHANDLUNG

1	PP Moplen EP-T30M ROSSO - Rot
2	Zincato Fe/Zn 8 cB (Bianco) - DIN 50961 - ... Weiss
3	Nitrurazione SURSUF - Nislid schwarz

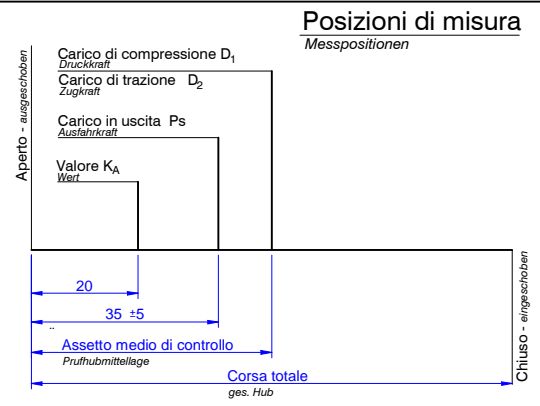

Corsa di controllo = 90mm Prüfhub		Assetto medio di controllo = 450±2mm Prüfhubmittellage	
Temperatura di controllo - Prüftemperatur		20°±5°C	
Temperatura di lavoro Min/Max - Temperatur im Einsatz Min/Max		von -30°C bis +110°C	
Compressione Druckstufe	D ₁	1245 ±190 N	v = 90mm/s ±10%
Estensione Zugstufe	D ₂	5100 ±750 N	v = 90mm/s ±10%
Compressione Anspruchschwelle	K _A	540 ±100 N	v = 12.5±2.5 mm/s
Carico in uscita Ausfahrkraft	P _S	250 ±50 N	ad interasse 495 mm

N.	Data Datum	10.06.2012	gb	Aggiunto "Temperatura di lavoro Min/Max".	
		10.05.2012	gb	Aggiornati : Interassi / Corsa / Peso / LOGO con www.	
		18.06.2008	gb	Da 318/213,5 a 320/>210	
N.		Descrizione Modifica - Beschreibung Aenderung			Mod. N°
		Denominazione Benennung Amm.re idraulico monocamera a gas Hydr. gas Einzelrohrdampfer			
Cliente - Kunde Pianoro (Bologna)		Finitura - Oberflächenbehandlung KF27-B (G _A 1.400 - 2.700 kg)			
Disegnatore - Zeichner Benizzi		Rif. originale - Original-Nr.		Sostituisce il.... - ersetzt	
Visto - geprüft		Data - Datum 27.06.2008		Scala - Masstab 1:1	
A3				87 0031 13 14	
		Peso - Gewicht 705 gr.			